


BSS 21 – 90 D - CS

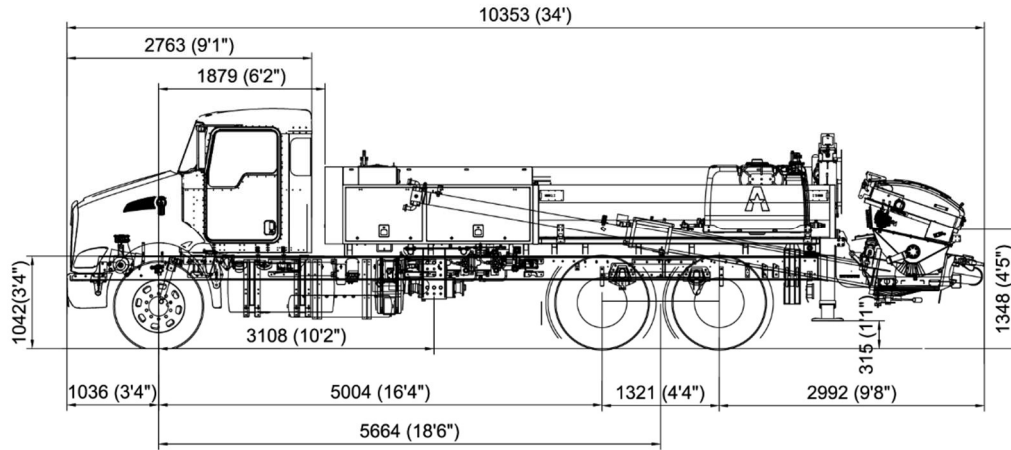

Note : Dimensions may vary depending on truck model.

GENERAL		OPTIONS	
Weight (Without Truck)	: 12000 kg (26454 lbs)	■ Hopper Vibrator	
ENGINE(*)		■ Hydraulic Driven Fan	
Power	: 265 kW (355 hp) (Diesel)	■ Betonstar IoT System	
PUMPING UNIT		■ Remote Control (HBC)	
Rod Side	Theo. Conc. Output (max)	: 90 m ³ /h (117,7 yd ³ /h)	■ Air Compressor
	Theo. Conc. Pressure (max)	: 92 bar (1334 psi)	■ High Pressure Cleaning Kit (160 bar / 2320 psi)
	Stroke	: 24 Stroke / min	■ Water Pump (67 lpm) (17,7 gpm)
Piston Side	Theo. Conc. Output (max)	: 60 m ³ /h (78,47 yd ³ /h)	■ Water Tank Capacity (650 lt (171,71 gal) and Hose 15 m (49'2''))
	Theo. Conc. Pressure (max)	: 148 bar (2146 psi)	
	Stroke	: 15 Stroke / min	
Concrete Valve	: S Valve System		
Switch-Over Pressure S-Tube	: 190 bar (2755,7 psi)		
Delivery Cylinders Diameter	: 200 mm (7,87'')		
Delivery Cylinders Stroke	: 2100 mm (6',9'')		
Hopper Capacity	: 650 l (171,71 gal)		
Hopper Outlet Diameter	: 125 mm (4,92'')		
Lateral Output Pipeline	: 150 mm (5,9'')		
Switching System	: Electromagnetic Sensor		
Lubrication System	: Elect. Controlled Central Syst. (LINCOLN)		
Driven by	: Engine		
Electric Box	: IP65 PLC Controlled		
CONTROL SYSTEM			
■ Smartstar Control			
■ Color LCD			
■ Diagnostic			
■ Fuel Saving Mode			
■ Remote Control			

(*) Engine power and norm values vary according to the engine brand.