



Stationary Concrete Pump

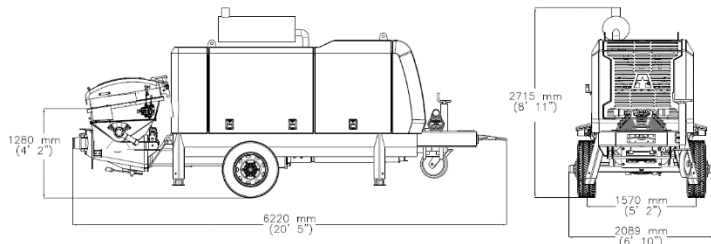

BSS 14-90-D

Weight: : 4.750 kg (10.471 lbs)

Engine* : 160 kW (214 hp) (Diesel)

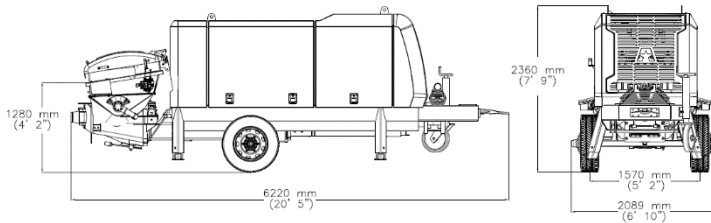

BSS 14-90-E

Weight: : 4.800 kg (10.582 lbs)

Engine* : 110 kW (150 hp) (Electric)

PUMPING UNIT

Rod Side	Theo. Conc. Output (max)	: 90 m ³ /h (117,71 yd ³ /h)
	Theo. Conc. Pressure (max)	: 71 bar (1029,76 psi)
	Stroke	: 34 Stroke / min
Piston Side	Theo. Conc. Output (max)	: 61 m ³ /h (79,8 yd ³ /h)
	Theo. Conc. Pressure (max)	: 106 bar (1537,4 psi)
	Stroke	: 23 Stroke / min

Concrete Valve : S Valve System

Switch-Over Pressure S-Tube : 190 bar (2755,7 psi)

Delivery Cylinders Diameter : 200 mm (7,87")

Delivery Cylinders Stroke : 1400 mm (55,11")

Hopper Capacity : 650 l (171,71 gal)

Hopper Outlet Diameter : 125 mm (5,5")

Lateral Output Pipeline : 150 mm (6")

Switching System : Elect. Magn. Sensor

Lubrication System : Hydraulic (LINCOLN)

Electric Box : Waterproof and PLC Controlled

CONTROL SYSTEM

■ Smartstar Control

■ Color LCD

■ Diagnostic

■ Fuel Saving Mode

■ Remote Control

OPTIONS

■ Hopper Vibrator

■ Hydraulic Driven Fan

■ Betonstar IoT System

■ Remote Control (HBC)

■ Air Compressor

■ High Pressure Cleaning Kit (135 bar / 1958 psi)

■ Water Pump (67 lpm) (17.7 gpm)

■ Water Tank (500 l (132 gal) and Hose 15 m (49'2"))

(*) Engine power and norm values vary according to the engine brand

