


## BSS 10-70 CS

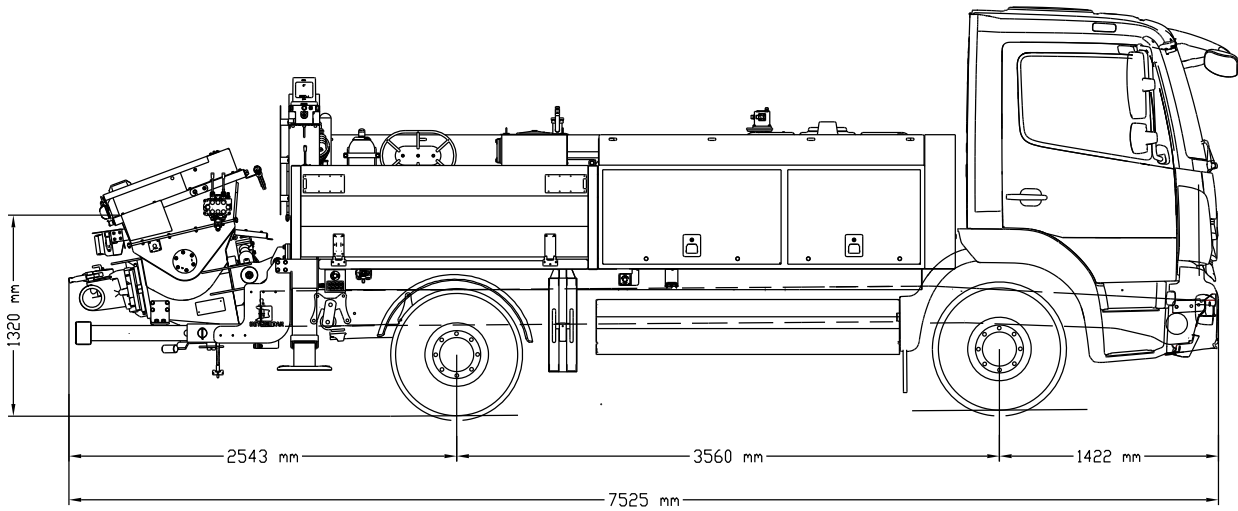

Note : Dimensions may vary depending on truck model.

GENERAL		OPTIONS	
Weight (Without Truck)	: 4.645 kg	■ Hopper Vibrator	
<b>PUMPING UNIT</b>		■ Hydraulic Driven Fan	
Piston Side	Theo. Conc. Output (max) : 70 m <sup>3</sup> /h	■ Betonstar IoT System	
	Theo. Conc. Pressure (max) : 81 bar	■ Remote Control (HBC)	
	Stroke : 28 Stroke / min	■ Air Compressor	
Rod Side	Theo. Conc. Output (max) : 90 m <sup>3</sup> /h	■ High Pressure Cleaning Kit (140 bar)	
	Theo. Conc. Pressure (max) : 54 bar		
	Stroke : 36 Stroke / min		
Concrete Valve	: S Valve System		
Switch-Over Pressure S-Tube	: 190 bar		
Delivery Cylinders Diameter	: 230 mm		
Delivery Cylinders Length	: 1000 mm		
Hopper Capacity	: 450 l		
Hopper Outlet Diameter	: 125 mm		
Reducer Output Diameter	: 150 mm		
Switching System	: Elect. Magn. Sensor		
Lubrication System	: Hydraulic (LINCOLN)		
Driven by	: PTO or Gear Box		
Electric Box	: Waterproof and PLC Controlled		
<b>WATER TANK AND PUMP</b>			
Water Pump	: 67 lpm		
Water Tank Capacity	: 650 l and Hose 15 m		
<b>CONTROL SYSTEM</b>			
■ Smartstar Control			
■ Color LCD			
■ Diagnostic			
■ Fuel Saving Mode			
■ Remote Control (Hetric)			