



Stationary Concrete Pump

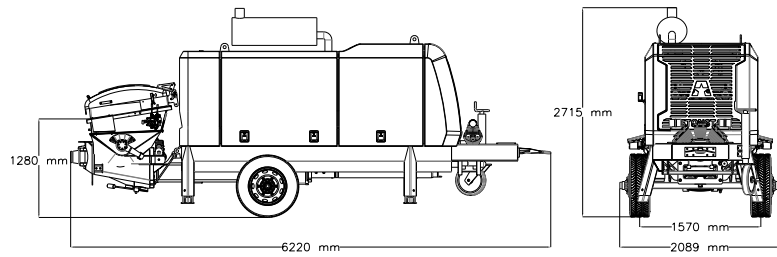

BSS 14-90-D

Weight: : 4.750 kg

Engine* : 160 kW (214 hp) (Diesel)

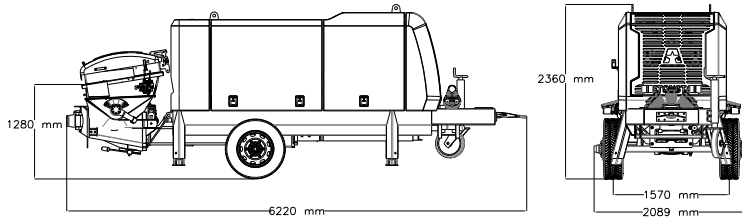

BSS 14-90-E

Weight: : 4.800 kg

Engine* : 110 kW (150 hp) (Electric)

PUMPING UNIT

Rod Side	Theo. Conc. Output (max)	: 90 m ³ /h
	Theo. Conc. Pressure (max)	: 71 bar
	Stroke	: 34 Stroke / min
Piston Side	Theo. Conc. Output (max)	: 61 m ³ /h
	Theo. Conc. Pressure (max)	: 106 bar
	Stroke	: 23 Stroke / min

Concrete Valve	: S Valve System
Switch-Over Pressure S-Tube	: 190 bar
Delivery Cylinders Diameter	: 200 mm
Delivery Cylinders Length	: 1400 mm
Hopper Capacity	: 650 l
Hopper Outlet Diameter	: 125 mm
Reducer Output Diameter	: 150 mm
Switching System	: Elect. Magn. Sensor
Lubrication System	: Hydraulic (LINCOLN)
Electric Box	: Waterproof and PLC Controlled

CONTROL SYSTEM

- Smartstar Control
- Color LCD
- Diagnostic
- Fuel Saving Mode
- Remote Control

OPTIONS

- Hopper Vibrator
- Hydraulic Driven Fan
- Betonstar IoT System
- Remote Control (HBC)
- Air Compressor
- High Pressure Cleaning Kit (140 bar)
- Water Pump (67 lpm)
- Water Tank (500 l and Hose 15 m)

(*) Engine power and norm values vary according to the engine brand

